


LED EXIT LIGHT

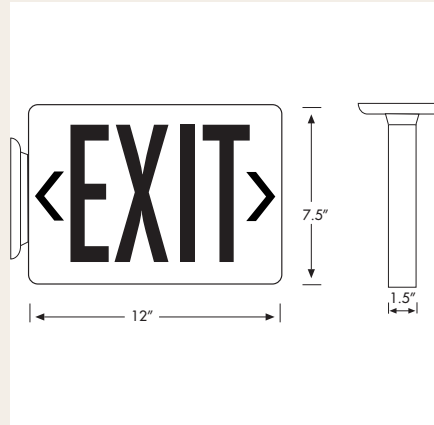


NSI's low profile LED exit lights have fully automatic operation at 120 or 277 VAC with 25+ years LED lamp life. LED exit lights have a universal mounting canopy for side or top installation. Injection-molded V-O flame retardant high-impact thermoplastic housing in a pleasing neutral color paired with a low profile design and excellent energy savings.

CATALOG NO.	UPC NO.	TYPE	LETTERING	HOUSING	SHIPPING WEIGHT (LBS)
EXLRW	05215	AC	red	white	3
EXLGW	05216	AC	green	white	3
EXLRB	05217	AC	red	black	3
EXLGB	05218	AC	green	black	3
EXLBURW	05219	battery backup	red	white	3
EXLBUGW	05220	battery backup	green	white	3
EXLBURB	05221	battery backup	red	black	3
EXLBUGB	05222	battery backup	green	black	3

NOTE: Remote Capable version available – call for special order quote.

DIE-CAST ALUMINUM LED EXIT LIGHT

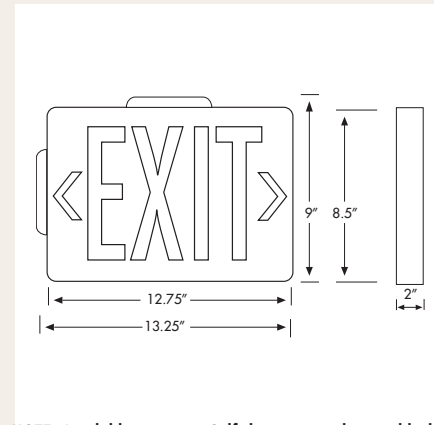

NSI's die-cast aluminum LED exit lights have fully automatic operation at 120 or 277 VAC, in AC only or battery units. Die-cast LED exit lights have a universal mounting canopy for side or top installation. Excellent energy savings of LED in a curved design with universal K/O chevrons. Face plate is brushed aluminum.

NOTE: Available versions: Self-diagnostic, white or black Powdercoated – call for special order quote.

CATALOG NO.	UPC NO.	TYPE	NO. OF FACES	LETTERING	HOUSING	SHIPPING WEIGHT (LBS)
DEXL1RB	05239	AC	one	red	black	4.7
DEXL2RB	05240	AC	two	red	black	5.7
DEXL1GB	05241	AC	one	green	black	4.7
DEXL2GB	05242	AC	two	green	black	5.7
DEXLBU1RB	05243	battery backup	one	red	black	4.7
DEXLBU2RB	05244	battery backup	two	red	black	5.7
DEXLBU1GB	05245	battery backup	one	green	black	4.7
DEXLBU2GB	05246	battery backup	two	green	black	5.7
DEXFPRB	05247	plate	n/a		red on aluminum	1
DEXFPGB	05248	plate	n/a		green on aluminum	1