




Cable Ties

STANDARD (NATURAL)

STANDARD CABLE TIES (NATURAL)

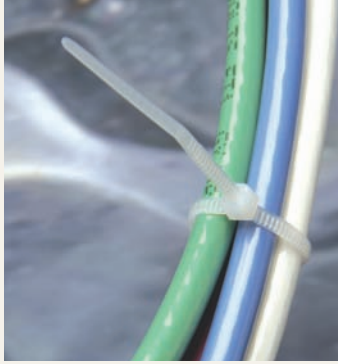

Designed for quick and easy use. Strong and flexible, they can be wrapped around a bundle quickly and the tail easily inserted into a self-locking head. The smaller standard size ties even have bent tails to facilitate rapid tail-to-head insertion by user. Made of high-strength Nylon 66 that resists abrasion and chemicals such as common oils, greases, solvents, dilute acids and alkalines. They are fungus-resistant, self-extinguishing and have excellent dielectric

properties. Designed for continuous use from -40°F to 185°F (-40°C to 85°C) and will withstand temperatures up to 300°F (149°C). 94V-2 flammability rating.

Four sizes of canister packs include popular assortments of standard and colored cable ties. The ties are provided in an air-tight canister to prevent them from drying out, thus extending their life.

CATALOG NO.	UPC CODE	(INCHES)		MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH	PACKAGING		SHPG WT. LBS./100	
		LENGTH	WIDTH			STD. PKG.	STD. CTN.		
418	05000	4	.100	7/8	18 lbs.	100	5,000	0.08	Miniature
418X	05120	4	.100	7/8	18 lbs.	1,000	5,000	0.08	
518	05127	5.5	.100	1 3/8	18 lbs.	100	5,000	0.10	
518X	05128	5.5	.100	1 3/8	18 lbs.	1,000	5,000	0.10	
818	05003	8	.100	2 1/8	18 lbs.	100	3,000	0.15	
818X	05121	8	.100	2 1/8	18 lbs.	1,000	3,000	0.15	
540	04192	5.5	.130	1 3/8	40 lbs.	100	3,000	0.15	Intermediate Duty
540X	04193	5.5	.130	1 3/8	40 lbs.	1,000	3,000	0.15	
840	05004	8	.140	2 1/8	40 lbs.	100	3,000	0.24	
840X	05065	8	.140	2 1/8	40 lbs.	1,000	3,000	0.24	
1140	05132	11.5	.140	3 1/4	40 lbs.	100	2,000	0.33	
450	05066	4.75	.187	1 1/8	50 lbs.	100	5,000	0.17	
450X	05129	4.75	.187	1 1/8	50 lbs.	1,000	5,000	0.17	
650	05130	6.25	.187	1 5/8	50 lbs.	100	3,000	0.26	
650X	05131	6.25	.187	1 5/8	50 lbs.	1,000	3,000	0.26	
750	05002	7.5	.187	2	50 lbs.	100	3,000	0.29	
750X	05061	7.5	.187	2	50 lbs.	1,000	3,000	0.29	
850	05070	8	.187	2 1/8	50 lbs.	100	3,000	0.33	
850X	05049	8	.187	2 1/8	50 lbs.	1,000	3,000	0.33	
1150	05005	11	.187	3 1/8	50 lbs.	100	2,000	0.48	
1150X	05062	11	.187	3 1/8	50 lbs.	1,000	2,000	0.48	
1450	05006	14.5	.187	4	50 lbs.	100	3,000	0.60	Light Heavy Duty
1450X	05063	14.5	.187	4	50 lbs.	1,000	3,000	0.60	
1850	05071	17.75	.187	5	50 lbs.	100	2,000	0.72	
8120	05072	8	.300	2	120 lbs.	100	2,000	0.60	
8120X	05067	8	.300	2	120 lbs.	1,000	2,000	0.60	
11120	05073	11	.300	3	120 lbs.	100	2,000	0.88	
14120	05007	15	.300	4 3/8	120 lbs.	100	2,000	1.28	
18175	05015	17.75	.315	5 1/4	175 lbs.	50	500	1.53	
24175	05010	24	.315	7 1/4	175 lbs.	50	500	2.56	
30175	05014	30	.354	9 1/4	175 lbs.	50	500	3.18	Heavy Duty
36175	05012	36	.354	10 5/8	175 lbs.	50	500	3.86	
48175	05013	48	.354	15	175 lbs.	50	500	5.28	
60175	04194	59	.354	18 1/4	175 lbs.	50	500	6.00	
15250	05075	15	.500	4 3/8	250 lbs.	50	500	2.57	Extra Heavy Duty
18250	05076	18.87	.500	5 1/2	250 lbs.	50	500	3.09	
22250	05077	22.87	.500	6 7/8	250 lbs.	50	500	3.70	
28250	05078	28.75	.500	8 7/8	250 lbs.	50	500	4.53	
34250	05079	34.68	.500	10 1/2	250 lbs.	50	500	5.63	
40250	05084	40.5	.500	12 1/2	250 lbs.	50	500	6.60	