

GFCIs

Weather-Resistant GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




GFCIs

Features	
<ul style="list-style-type: none"> Weather-Resistant: Meets 2008 National Electrical Code® Weather-Resistant requirements. Tamper-Resistant: Meets 2008 National Electrical Code® Tamper-Resistant requirements. Protects children: patented shutter system helps prevent improper insertion of foreign objects. Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including: <ul style="list-style-type: none"> Ultraviolet light exposure test Cold impact test Accelerated aging test Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance. SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. 	<ul style="list-style-type: none"> FSUL Listed (Federal Specification WC596). Trip indicator light (red LED). Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. Two back wire holes per terminal. Ground screw has a back wire clamp for easy installation. 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. Mounting screws are shipped captive in the device and wall plate for easier installation. High-impact-resistant thermoplastic construction. Extra-long nickel post-plated steel mounting strap. Button colors match the device face. Dual-direction test and reset buttons. Class A rated GFCI. Supplied with matching TP26 nylon wall plate. Tri-drive screws.
Specifications	
<ul style="list-style-type: none"> Supply Voltage: 125VAC, 60 Hz Supply Voltage Range: 102-132 VAC Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> Trip Time: 0.025 sec., nominal per UL Standard 20 Amp feed-thru capacity

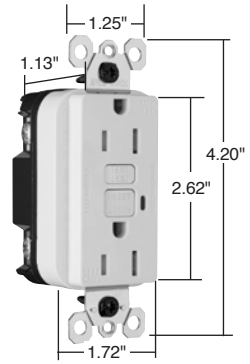

1595TRWRW

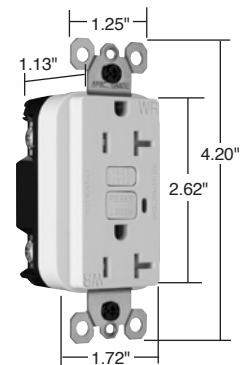

2095TRWRW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Weather-Resistant 15 Amp Duplex GFCI							
1595TRWRI	15	125	Ivory	5-15R	•	•	•
1595TRWRW	15	125	White	5-15R	•	•	•
1595TRWR	15	125	Brown	5-15R	•	•	•
1595TRWRLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Weather-Resistant 20 Amp Duplex GFCI							
2095TRWRI	20	125	Ivory	5-20R	•	•	•
2095TRWRW	20	125	White	5-20R	•	•	•
2095TRWR	20	125	Brown	5-20R	•	•	•
2095TRWRGRY	20	125	Gray	5-20R	•	•	•
2095TRWRLA	20	125	Light Almond	5-20R	•	•	•



For Configurable Solutions, see Page U-1.

2008 National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Weather-Resistant GFCI Receptacles